
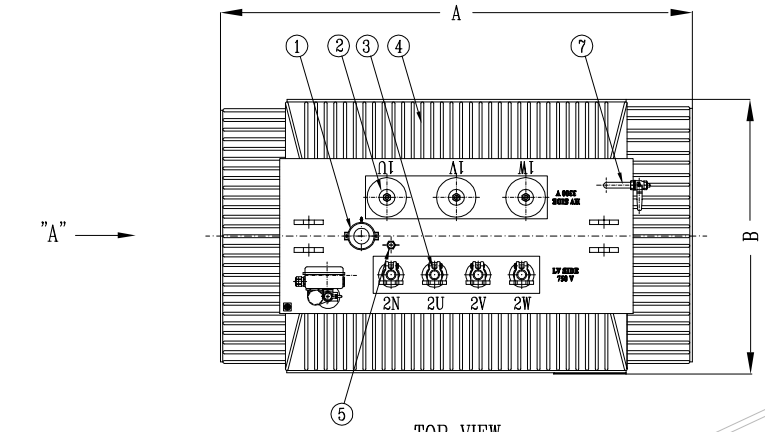


"PLEASE REVIEW PHASE MARKING"

REFERENCE ONLY - NOT FOR APPROVAL

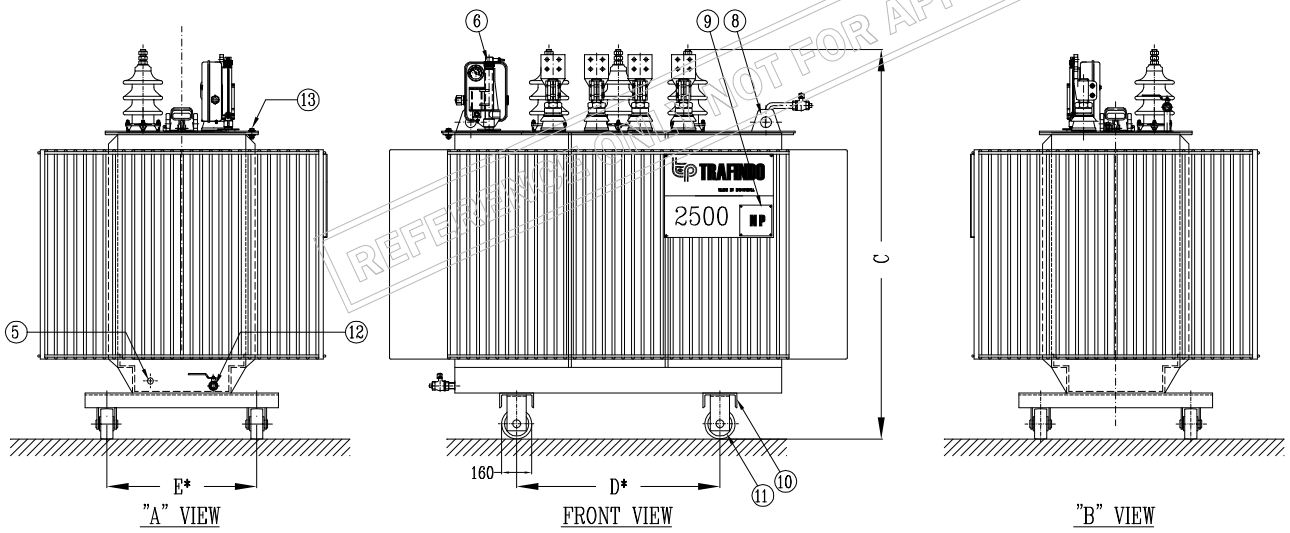

ITEM	PART'S NAME	QTY
13	GROUNDING PLATE	1
12	DRAIN VALVE	1
11	ROLLER	4
10	CHANNEL BASE	2
9	NAME PLATE & IDENTITY OF TRANSFORMER	1
8	TRANSFORMER LIFTING LUG	4
7	FILTER VALVE	1
6	INTEGRATED SAFETY DEVICE	1
5	EARTHING TERMINAL	2
4	RADIATOR	4
3	LV. BUSHING	4
2	HV. BUSHING	3
1	OFF – LOAD TAP CHANGER	1

THIS DRAWING IS THE PROPERTY OF PT TRAFOINDO PRIMA PERKASA
IT MUST NOT BE REPRODUCED, UTILIZED, COMMUNICATED OR PUBLISHED WITHOUT EXPRESS PERMISSION

TOLERANCE DIM A,B,C : ± 3 %
TOLERANCE DIM D,E : ± 5 mm

A	B	C	D*	E*
2100	1420	2010	850	850

TOTAL OF TRANSFORMER WEIGHT	5310 Kg
WEIGHT OF OIL	1370 Kg

DIMENSION IN MM

REV	ITEM	DATE	NAME

	DATE	NAME
DESIGNED	15-03-17	UNUN
DRAWN	23-02-22	IMAM
CHECKED	23-02-22	FAIZA

pt. trafoindo prima perkasa

S1/17/0344 P22-0220

THIS DRAWING IS FOR PRELIMINARY REFERENCE
For detail dimensions and weight, please refer to drawing after confirmed order
INI ADALAH DRAFT DRAWING
Untuk detail dimensi dan berat, mohon mengacu ke approval drawing (setelah order)

3 PHASE, 50 Hz, 2500 kVA, Dyn5
PRIM. VOLTAGE : 3.465-3.3825-3.3^{R}-3.2175-3.135 kV
SEC. VOLTAGE : 750 V

SCALE : N.T.S
A4

PROJ.

PRELIMINARY OUTLINE DRAWING
F-4111-RY-K02-1a-3

So.No.: - -

CUSTOMER :